


TECHNICAL INFORMATION

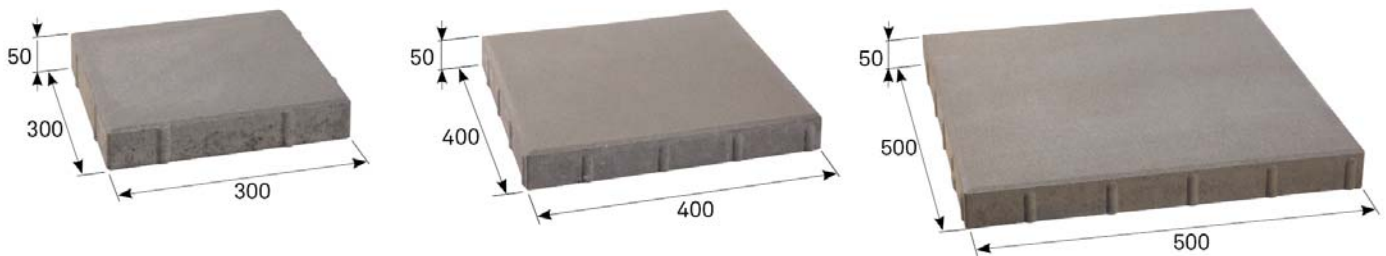

Layout dimensions

name	layout dimensions (mm)			number of pieces on the layer	consumption pcs/m ²	quantity (m ²)		weight (kg)			max. tonnage up to 24 t	
	height	length	width			layer	pallet	pcs	pallet	pallet included	pcs of pallets	m ²
BEST SIDEWALK PAVING 	50	300	300	12	11.11	1.08	12.96	11.20	1613	1651	14	181.44
	50	400	400	6	6.25	0.96	11.52	19.80	1426	1464	16	184.32
	50	500	500	4	4.00	1.00	12.00	31.00	1488	1526	15	180.00

We are holders of the Gold Certificate for complete certification according to ISO 9001, ISO 14001, ISO 50001, ISO 45001. Our products are manufactured and inspected pursuant to European harmonized standards.

product height	production standard	maximum deviation from declared production dimensions		deviations from flatness and curvature			bending strength	skid/slip resistance	ČSN 73 1326, weather resistance, method A
		width and length	height	length of gauge	max. convexity	max. concavity			
50 mm	ČSN EN 1339	±2 mm	±3 mm	500 mm	2.5 mm	1.5 mm	≥ 4 MPa	satisfactory	≤ 1.0 kg/m ² after 100 cycles

EXPLANATIONS OF PICTOGRAMS



Paving designed for sidewalks, bicycle paths and non-motorized traffic.




Surface basic




Facet classic

SURFACE FINISHES AND COLOURS




NATURAL




COLORMIX ARABICA



COLORMIX BRILANT



COLORMIX ETNA



COLORMIX SAND

surface	characteristics	colour
STANDARD	standard surface with natural aggregate roughness corresponding to the visible layer of concrete paving	natural, colormix arabica, colormix brilant, colormix etna, colormix sand

GENERAL INFORMATION

Two-layer vibrated paving with high strength, frost resistance, surface resistance to water and chemical de-icing agents. The paving has low abrasion and good adhesion properties. BEST concrete elements are permanently impregnated against contamination.

Minimum shipping quantity is 1 layer (each stone dimension separately), stones cannot be shipped as single units. The goods are loaded on marked pallets BEST (30 kg) or BEST large (38 kg) according to the production capacity of individual plants.

When laying, it is important to follow the correct procedure according to the instructions for use (www.best.cz). The pavement can be laid in a gravel bed or on rubber or plastic targets (also available from BEST).

Caution: We do not recommend to compact the BEST SIDEWALK PAVING paving with a vibrating plate; the correct seating of the pavement on the subfloor is ensured by tapping with a rubber stick over a wooden board.



703/2020

