
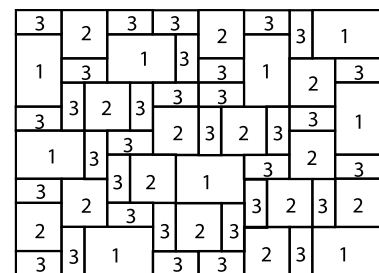


TECHNICAL INFORMATION

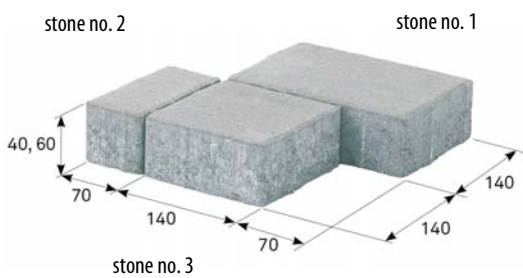

Layout dimensions, set of 3 types of stones

Indicative composition of stones on the layer

name	layout dimensions (mm)			number of pieces on one layer	quantity (m ²)		weight (kg)			max. tonnage up to 24 t		
	height	length	width		layer	pallet	layer	pallet	pallet included	pcs of pallets	m ²	
	stone no. 1	40	210	140	9	0.86	17.20	76	1520	1550	15	258.00
	stone no. 2	40	140	140	14							
	stone no. 3	40	140	70	33							
	stone no. 1	60	210	140	9	0.86	10.32	110	1320	1350	17	175.44
	stone no. 2	60	140	140	14							
	stone no. 3	60	140	70	33							

We are holders of the Gold Certificate for complete certification according to ISO 9001, ISO 14001, ISO 50001, ISO 45001. Our products are manufactured and inspected pursuant to European harmonized standards.

product height	production standard	maximum deviation from declared production dimensions		transverse tensile strength	bending strength	skid/slip resistance	ČSN 73 1326, weather resistance, method A
		width and length	height				
40 mm	ČSN EN 1338	±2 mm	±3 mm	≥ 3.6 MPa	x	satisfactory	≤ 1.0 kg/m ² after 100 cycles
40 mm stone no. 1	ČSN EN 1339	±5 mm	±3 mm	x	≥ 5.0 MPa	satisfactory	≤ 1.0 kg/m ² after 100 cycles
60 mm	ČSN EN 1338	±2 mm	±3 mm	≥ 3.6 MPa	x	satisfactory	≤ 1.0 kg/m ² after 100 cycles

EXPLANATIONS OF PICTOGRAMS



Paving designed for sidewalks, bicycle paths and non-motorized traffic.



Paving intended for sidewalks, bicycle paths, parking spaces and movement of motor vehicles up to 3.5 t.




Surface basic




Facet classic

SURFACE FINISHES AND COLOURS




NATURAL




COLORMIX BRILANT



COLORMIX ARABICA



COLORMIX AUTUMN



COLORMIX SAHARA

surface	characteristics	colour
STANDARD	standard surface with natural aggregate roughness corresponding to the visible layer of concrete paving	natural, colormix brilant, colormix arabica, colormix autumn, colormix sahara

GENERAL INFORMATION

Two-layer vibrated paving with high strength, frost resistance, surface resistance to water and chemical de-icing agents. The paving has low abrasion and good adhesion properties. BEST concrete elements are permanently impregnated against contamination.

The minimum shipping quantity is 1 layer; the stones cannot be delivered individually and it is not possible to determine the ratio of stones in the composition. The goods are loaded on marked pallets BEST (30 kg) or BEST large (38 kg) according to the production capacity of individual plants.

When laying, it is important to follow the correct procedure according to the instructions for use (www.best.cz).

Caution: BEST KORZO paving must be compacted with a vibrating plate with a plastic pad weighing no more than 100-130 kg with a set centrifugal force of 18-20 kN.

