
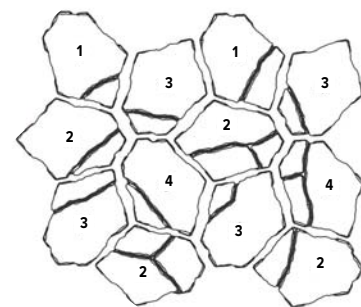


TECHNICAL INFORMATION

Example of stone

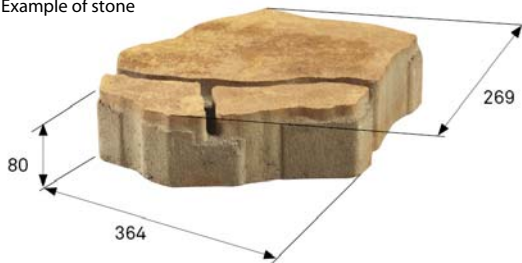

Layout dimensions

Indicative composition of stones on the layer

name	layout dimensions (mm)			number of pieces on one layer	quantity (m ²)		approximate consumption pcs/m ²	weight (kg)			max. tonnage up to 24 tonnes	
	height	length	width		layer	pallet		layer	pallet	pallet included	pcs of pallets	m ²
BEST SOLITERA 	80	irregular size approx. 364x269		12	0.73	6,57	14.28	150	1350	1388	17	111.69

We are holders of the Gold Certificate for complete certification according to ISO 9001, ISO 14001, ISO 50001, ISO 45001. Our products are manufactured and inspected pursuant to European harmonized standards.

product height	production standard	maximum deviation from declared production dimensions		bending strength	skid/slip resistance	ČSN 73 1326, weather resistance, method A
		width and length	height			
80 mm	ČSN EN 1339	±5 mm	±3 mm	≥ 5 MPa	satisfactory	≤ 1.0 kg/m ² after 100 cycles

EXPLANATIONS OF PICTOGRAMS



Paving intended for sidewalks, bicycle paths, parking spaces and movement of motor vehicles up to 3.5 t.




Surface relief




No facet

SURFACE FINISHES AND COLOURS



COLORMIX ETNA



COLORMIX ARABICA



COLORMIX BRILANT



COLORMIX SAND

surface	characteristics	colour
RELIEF	shaped surface with natural roughness, where the visible layer is formed by the height differences between the different levels of the stone	colormix etna, colormix arabica, colormix brilant, colormix sand

GENERAL INFORMATION

Two-layer vibrated paving with high strength, frost resistance, surface resistance to water and chemical de-icing agents. The paving has low abrasion and good adhesion properties. BEST concrete elements are permanently impregnated against contamination.

Minimum shipping quantity is 1 layer, stones cannot be shipped as single units. The goods are loaded on marked pallets BEST (30 kg) or BEST large (38 kg) according to the production capacity of individual plants.

When laying, it is important to follow the correct procedure according to the instructions for use (www.best.cz).

Caution: BEST SOLITERA paving must be compacted with a vibrating plate with a plastic pad weighing no more than 100-130 kg with a set centrifugal force of 18-20 kN.

